
PXPPVC12FIM03ACL020PVC Datasheet bulg

Product Name // M12 Series A Code PVC In-Line **Overmould Flex Cable Connector 3 Contact Pins Pre-Wired** With 2M PVC Jacket Cable





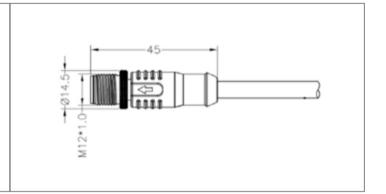

// Product Description:

- M12 Series In-Line Overmould Flex Body Connectors
- 0 Water and dustproof to IP67 when mated with compatible connector
- 0 Pin only
- 3, 4, 5, 8, 12 Contact (3, 8, 12 Contact are A Code, 4 Contact are choice of A Code or D Code, 5 Contact are choice of A Code or B Code)
- Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- O Choice of Sealing Caps available separately to maintain IP rating of unmated connectors
- O Mate with M12 Series Flex Body and Panel Mount Connectors

General Information:

Product Display Title: M12 Series In-Line Overmould Flex Body Connectors

Product Family: Circular Automation Connectors

Product Series: M12 Series

Is Vitalis: PVC **Body Material:**

Cable Length: Plug Contact Contact Type: Coupling Type: Screw 4A **Current Max:**

Diameter Over Coupling Ring Mm: 20mm Function: Inline Connector Single Ended Cable

Ip Rating: IP67 +80°C Max Operating Temperature: Min Operating Temperature: -25°C **Number Of Contacts:**

Pin Layout Code: Sheath Material: PVC Thread Size: Voltage Max:

3 Contacts A Code M12 x 1 250V

// Product PDF Links

// Product 3D CAD Model Links PXPPVC12FIM03ACL020PVC3D CAD M