
PXPSPE4030/2M/26 Datasheet



Product Name // 4000 Series SPE Flex to IP20 Cable Assembly - 2m - 26 AWG





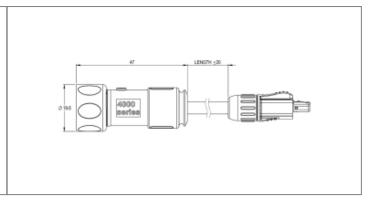

// Product Description:

- O Pre-Wired Flex Patch Cord Connector
- SPE T1 interface within 4000 Series Buccaneer housing to
 IP20 T1 connector
- O 2m cable length
- 26 AWG cable gauge

- Sealing caps available separately to maintain IP rating of unmated connectors
- Mates with PXPSPE4032 and PXPSPE4033 panel mounting connectors
- O Connector interfaces compliant with IEC 63171-6
- Cable compliant with IEC 61156-12

// General Information:

Product Display Title:SPE Patch Cord AssemblyProduct Family:Circular Data ConnectorsProduct Series:4000 Series - SPEBody Colour:BlackBody Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic BodyCable Length:2m

Contact Type:Plug ContactCoupling Type:Bayonet LockCurrent Max:4A

Data Cable Type:

Diameter Over Coupling Ring Mm: 19.7mm
Ethernet Category: 10BASE-T1L

Flamability Rating:
Function:

Ip Rating:
Max Operating Temperature:
Min Operating Temperature:
Number Of Contacts:
Rohs Compliant:

Voltage Max:

4A
26 AWG SPE Cable - IP20 Plug to Sealed Plug
19.7mm

UL94V-0 Patch Cord Cable Assembly

IP66, IP67, IP73

+85°C -30°C 2 Contacts Yes 60V

// Product PDF Links



// Product 3D CAD Model Links

