


# PXPSPE4030/3M/22 Datasheet

**Product Name // 4000 Series SPE Flex to IP20 Cable**  
**Assembly - 3m - 22 AWG**

 [View Product Page](#)

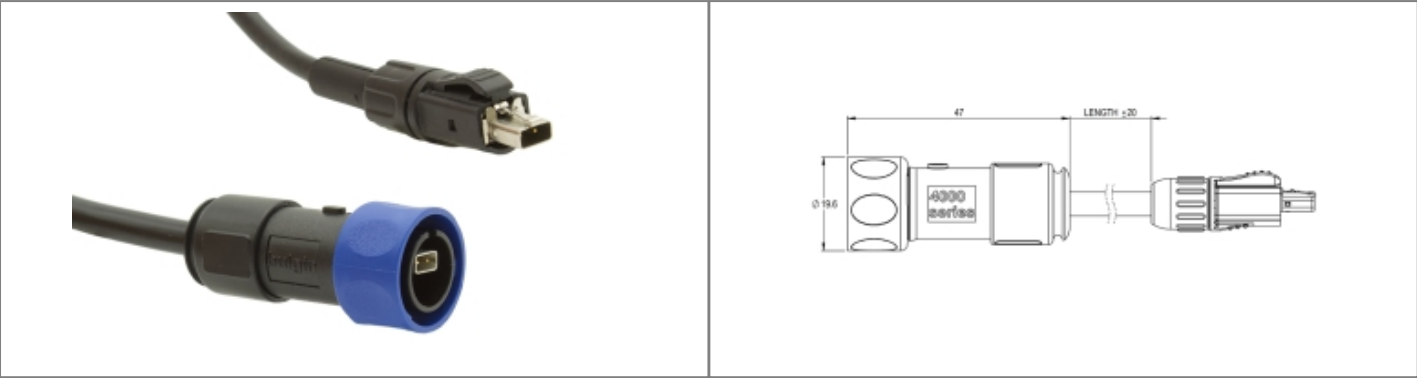

**// Product Description:**

- Pre-Wired Flex Patch Cord Connector
  - SPE T1 interface within 4000 Series Buccaneer housing - to IP20 T1 connector
  - 3m cable length
  - 22 AWG cable gauge
- Sealing caps available separately to maintain IP rating of unmated connectors
  - Mates with PXPSPE4032 and PXPSPE4033 panel mounting connectors
  - Connector interfaces compliant with IEC 63171-6
  - Cable compliant with IEC 61156-12

**// General Information:**

|                                 |                                                   |
|---------------------------------|---------------------------------------------------|
| Product Display Title:          | SPE Patch Cord Assembly                           |
| Product Family:                 | Circular Data Connectors                          |
| Product Series:                 | 4000 Series - SPE                                 |
| Body Colour:                    | Black                                             |
| Body Material:                  | Polycarbonate/Polybutylene Terephthalate (PC/PBT) |
| Body Material Type:             | Plastic Body                                      |
| Cable Length:                   | 3m                                                |
| Contact Type:                   | Plug Contact                                      |
| Coupling Type:                  | Bayonet Lock                                      |
| Current Max:                    | 4A                                                |
| Data Cable Type:                | 22 AWG SPE Cable - IP20 Plug to Sealed Plug       |
| Diameter Over Coupling Ring Mm: | 19.7mm                                            |
| Ethernet Category:              | 10BASE-T1L                                        |
| Flamability Rating:             | UL94V-0                                           |
| Function:                       | Patch Cord Cable Assembly                         |
| Ip Rating:                      | IP66, IP67, IP68                                  |
| Max Operating Temperature:      | +85°C                                             |
| Min Operating Temperature:      | -30°C                                             |
| Number Of Contacts:             | 2 Contacts                                        |
| Rohs Compliant:                 | Yes                                               |
| Voltage Max:                    | 60V                                               |

**// Product PDF Links**

 [4000 Series SPE connectors product...](#)

**// Product 3D CAD Model Links**

 [PXPSPE4030/3M/223D CAD Model](#)



Have a question or project enquiry  
you'd like to talk to us about?



[Click Here To Contact Us](#)