
PXPSPE4030/3M/22 Datasheet



Product Name // 4000 Series SPE Flex to IP20 Cable Assembly - 3m - 22 AWG





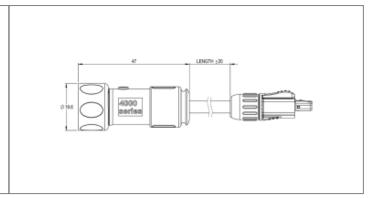

// Product Description:

- O Pre-Wired Flex Patch Cord Connector
- SPE T1 interface within 4000 Series Buccaneer housing to
 IP20 T1 connector
- O 3m cable length
- 22 AWG cable gauge

- Sealing caps available separately to maintain IP rating of unmated connectors
- Mates with PXPSPE4032 and PXPSPE4033 panel mounting connectors
- O Connector interfaces compliant with IEC 63171-6
- Cable compliant with IEC 61156-12

// General Information:

 Product Display Title:
 SPE Patch Cord Assembly

 Product Family:
 Circular Data Connectors

 Product Series:
 4000 Series - SPE

 Body Colour:
 Black

 Body Material:
 Polycarbonate/Polybutylene Terephthalate (PC/PBT)

 Body Material Type:
 Plastic Body

 Cable Length:
 3m

Contact Type:Plug ContactCoupling Type:Bayonet LockCurrent Max:4AData Cable Type:22 AWG SPE

Data Cable Type:22 AWG SPE Cable - IP20 Plug to Sealed PlugDiameter Over Coupling Ring Mm:19.7mm

Ethernet Category: 10BASE-T1L
Flamability Rating: UL94V-0
Function: Patch Cord C

Function: Patch Cord Cable Assembly Ip Rating: IP66, IP67, IP70

Max Operating Temperature:+85°CMin Operating Temperature:-30°CNumber Of Contacts:2 ContactsRohs Compliant:YesVoltage Max:60V

// Product PDF Links



// Product 3D CAD Model Links

