
# PXPSPE4031/5M/22 Datasheet

## Product Name // 4000 Series SPE Flex to Flex Cable Assembly - 5m - 22 AWG

View Product Page



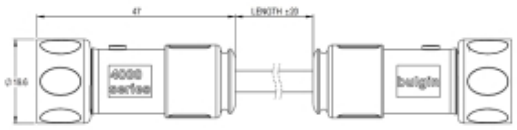


## // Product Description:

- Pre-Wired Flex Patch Cord Connector
- SPE T1 interface within 4000 Series Buccaneer housing on both ends
- 5m cable length
- 22 AWG cable gauge
- Sealing caps available separately to maintain IP rating of unmated connectors
- Mates with PXPSPE4032 and PXPSPE4033 panel mounting connectors
- Connector interfaces compliant with IEC 63171-6
- Cable compliant with IEC 61156-12

## // General Information:

| | |
|---|---|
| **Product Display Title:** | SPE Patch Cord Assembly |
| **Product Family:** | Circular Data Connectors |
| **Product Series:** | 4000 Series - SPE |
| **Body Colour:** | Black |
| **Body Material:** | Polycarbonate/Polybutylene Terephthalate (PC/PBT) |
| **Body Material Type:** | Plastic Body |
| **Cable Length:** | 5m |
| **Contact Type:** | Plug Contact |
| **Coupling Type:** | Bayonet Lock |
| **Current Max:** | 4A |
| **Data Cable Type:** | 22 AWG SPE Cable - Sealed Plug to Sealed Plug |
| **Diameter Over Coupling Ring Mm:** | 19.7mm |
| **Ethernet Category:** | 10BASE-T1L |
| **Flamability Rating:** | UL94V-0 |
| **Function:** | Patch Cord Cable Assembly |
| **Ip Rating:** | IP66, IP67, IP68 |
| **Max Operating Temperature:** | +85°C |
| **Min Operating Temperature:** | -30°C |
| **Number Of Contacts:** | 2 Contacts |
| **Rohs Compliant:** | Yes |
| **Voltage Max:** | 60V |

### // Product PDF Links

4000 Series SPE connectors product...

### // Product 3D CAD Model Links

PXPSPE4031/5M/223D CAD Model