
# PXPSPE4031/5M/26 Datasheet



## Product Name // 4000 Series SPE Flex to Flex Cable

#### View Product Page

Assembly - 5m - 26 AWG

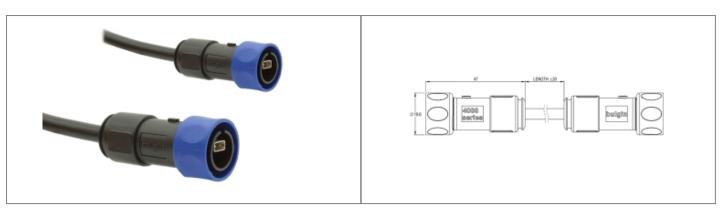

### // Product Description:

- O Pre-Wired Flex Patch Cord Connector
- O SPE T1 interface within 4000 Series Buccaneer housing on both ends
- O 5m cable length
- O 26 AWG cable gauge

- Sealing caps available separately to maintain IP rating of unmated connectors
- O Mates with PXPSPE4032 and PXPSPE4033 panel mounting connectors
- O Connector interfaces compliant with IEC 63171-6
- O Cable compliant with IEC 61156-12

#### // General Information:

Product Display Title: Product Family: **Product Series:** Body Colour: Body Material: Body Material Type: Cable Length: Contact Type: Coupling Type: Current Max: Data Cable Type: Diameter Over Coupling Ring Mm: Ethernet Category: Flamability Rating: Function: Ip Rating: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: **Rohs Compliant:** Voltage Max:

SPE Patch Cord Assembly Circular Data Connectors 4000 Series - SPE Black Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body 5m Plug Contact **Bayonet Lock** 4A 26 AWG SPE Cable - Sealed Plug to Sealed Plug 19.7mm 10BASE-T1L UL94V-0 Patch Cord Cable Assembly IP66, IP67, IP75 +85°C -30°C 2 Contacts Yes 60V

#### // Product PDF Links

4000 Series SPE connectors product...

// Product 3D CAD Model Links

PXPSPE4031/5M/263D CAD Model