


PXPSPE4032 Datasheet

Product Name // 4000 Series SPE Flex Front Panel Mount

 [View Product Page](#)

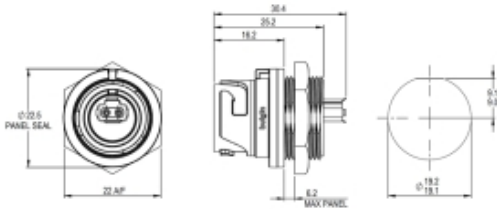

// Product Description:

- Front Panel Mounting Connector
- SPE T1 interface on both ends
- Sealing caps available separately to maintain IP rating of unmated connectors
- Mates with all Bulgin SPE patch cord assemblies - as well as unsealed T1 plugs
- Connector interfaces compliant with IEC 63171-6

// General Information:

Product Display Title:	SPE Front Panel Mount
Product Family:	Circular Data Connectors
Product Series:	4000 Series - SPE
Body Colour:	Black
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Body Material Type:	Plastic Body
Contact Type:	Socket Contact
Coupling Type:	Bayonet Lock
Current Max:	4A
Diameter Over Coupling Ring Mm:	19.7mm
Ethernet Category:	10BASE-T1L
Flamability Rating:	UL94V-0
Function:	Front Panel Mounting Connector
Ip Rating:	IP66, IP67, IP68
Max Operating Temperature:	+85°C
Min Operating Temperature:	-30°C
Max Panel Thickness:	6.2mm
Number Of Contacts:	2 Contacts
Rohs Compliant:	Yes
Voltage Max:	60V

// Product PDF Links

 [4000 Series SPE connectors product...](#)

// Product 3D CAD Model Links

 [PXPSPE40323D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)