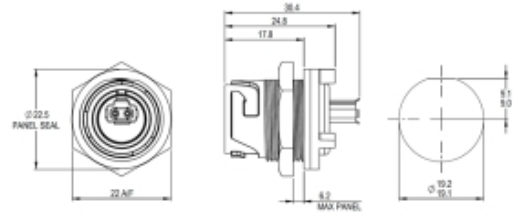


PXPSPE4033 Datasheet

Product Name // 4000 Series SPE Flex Rear Panel Mount

[View Product Page](#)


// Product Description:

- ⊞ Rear Panel Mounting Connector
- ⊞ SPE T1 interface on both ends
- ⊞ Sealing caps available separately to maintain IP rating of unmated connectors
- ⊞ Mates with all Bulgin SPE patch cord assemblies - as well as unsealed T1 plugs
- ⊞ Connector interfaces compliant with IEC 63171-6

// General Information:

Product Display Title:	SPE Rear Panel Mount
Product Family:	Circular Data Connectors
Product Series:	4000 Series - SPE
Body Colour:	Black
Body Material:	Polycarbonate/Polybutylene Terephthalate (PC/PBT)
Body Material Type:	Plastic Body
Contact Type:	Socket Contact
Coupling Type:	Bayonet Lock
Current Max:	4A
Diameter Over Coupling Ring Mm:	19.7mm
Ethernet Category:	10BASE-T1L
Flamability Rating:	UL94V-0
Function:	Rear Panel Mounting Connector
Ip Rating:	IP66, IP67, IP68
Max Operating Temperature:	+85°C
Min Operating Temperature:	-30°C
Max Panel Thickness:	6.2mm
Number Of Contacts:	2 Contacts
Rohs Compliant:	Yes
Voltage Max:	60V

// Product PDF Links

[4000 Series SPE connectors product...](#)

// Product 3D CAD Model Links

[PXPSPE4033D CAD Model](#)


Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)