
PXPSPE4034/1M/22 Datasheet



Product Name // 4000 Series SPE Flex to Open Cable Assembly - 1m - 22 AWG





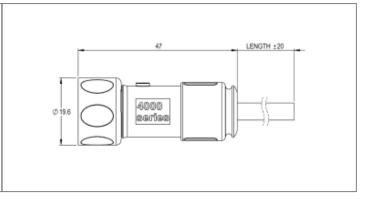

// Product Description:

- O Pre-Wired Flex Patch Cord Connector
- SPE T1 interface within 4000 Series Buccaneer housing to blunt cut cable
- O 1m cable length
- 22 AWG cable gauge

- Sealing caps available separately to maintain IP rating of unmated connectors
- Mates with PXPSPE4032 and PXPSPE4033 panel mounting connectors
- O Connector interfaces compliant with IEC 63171-6
- O Cable compliant with IEC 61156-12

// General Information:

Product Display Title:SPE Patch Cord AssemblyProduct Family:Circular Data ConnectorsProduct Series:4000 Series - SPEBody Colour:BlackBody Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic BodyCable Length:1m

Contact Type:Plug CorCoupling Type:BayonetCurrent Max:4AData Cable Type:22 AWG

Diameter Over Coupling Ring Mm:

Ethernet Category: Flamability Rating: Function:

Ip Rating: Max Opera

Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Rohs Compliant: Voltage Max: 1m
Plug Contact
Bayonet Lock
4A
22 AWG SPE Cable - Blunt-Cut to Sealed Plug
19.7mm
10BASE-T1L
UL94V-0
Patch Cord Cable Assembly

IP66, IP67, IP68 +85°C -30°C 2 Contacts Yes 60V

// Product PDF Links



// Product 3D CAD Model Links

