
## PXPSPE4034/2M/22 Datasheet



# Product Name // 4000 Series SPE Flex to Open Cable Assembly - 2m - 22 AWG





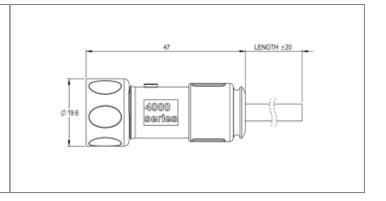

#### // Product Description:

- O Pre-Wired Flex Patch Cord Connector
- SPE T1 interface within 4000 Series Buccaneer housing to blunt cut cable
- O 2m cable length
- 22 AWG cable gauge

- Sealing caps available separately to maintain IP rating of unmated connectors
- O Mates with PXPSPE4032 and PXPSPE4033 panel mounting connectors
- O Connector interfaces compliant with IEC 63171-6
- Cable compliant with IEC 61156-12

### // General Information:

Product Display Title:SPE Patch Cord AssemblyProduct Family:Circular Data ConnectorsProduct Series:4000 Series - SPEBody Colour:BlackBody Material:Polycarbonate/Polybutylene Terephthalate (PC/PBT)Body Material Type:Plastic Body

Cable Length: 2m
Contact Type: Plug Contact
Coupling Type: Bayonet Lock
Current Max: 4A
Data Cable Type: 22 AWG SPE C

Data Cable Type:22 AWG SPE Cable - Blunt-Cut to Sealed PlugDiameter Over Coupling Ring Mm:19.7mm

Diameter Over Coupling Ring Mm: 19.7mm

Ethernet Category: 10BASE-T1L

Flamability Rating: UL94V-0

Function: Patch Cord Cable Assembly Ip Rating: IP66, IP67, IP69

Max Operating Temperature:

Min Operating Temperature:

-30°C

Number Of Contacts:

Rohs Compliant:

Yes

Voltage Max:

60V

#### // Product PDF Links



// Product 3D CAD Model Links

