
PXPSPE4034/2M/26 Datasheet



Product Name // 4000 Series SPE Flex to Open Cable

View Product Page

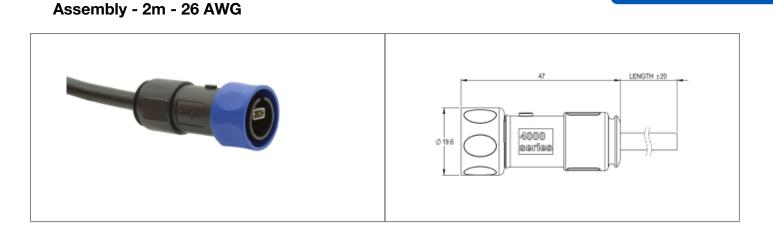

// Product Description:

- O Pre-Wired Flex Patch Cord Connector
- O SPE T1 interface within 4000 Series Buccaneer housing to blunt cut cable
- O 2m cable length
- O 26 AWG cable gauge

- Sealing caps available separately to maintain IP rating of unmated connectors
- O Mates with PXPSPE4032 and PXPSPE4033 panel mounting connectors
- O Connector interfaces compliant with IEC 63171-6
- O Cable compliant with IEC 61156-12

// General Information:

Product Display Title:
Product Family:
Product Series:
Body Colour:
Body Material:
Body Material Type:
Cable Length:
Contact Type:
Coupling Type:
Current Max:
Data Cable Type:
Diameter Over Coupling Ring Mm:
Ethernet Category:
Flamability Rating:
Function:
Ip Rating:
Ip Rating: Max Operating Temperature:
Max Operating Temperature:
Max Operating Temperature: Min Operating Temperature:
Max Operating Temperature: Min Operating Temperature: Number Of Contacts:

SPE Patch Cord Assembly Circular Data Connectors 4000 Series - SPE Black Polycarbonate/Polybutylene Terephthalate (PC/PBT) Plastic Body 2m Plug Contact **Bayonet Lock** 4A 26 AWG SPE Cable - Blunt-Cut to Sealed Plug 19.7mm 10BASE-T1L UL94V-0 Patch Cord Cable Assembly IP66, IP67, IP73 +85°C -30°C 2 Contacts Yes 60V

// Product PDF Links

4000 Series SPE connectors product...

// Product 3D CAD Model Links

PXPSPE4034/2M/263D CAD Model