PXPSPE4034/3M/26 Datasheet




Product Name // 4000 Series SPE Flex to Open Cable

View Product Page

Assembly - 3m - 26 AWG



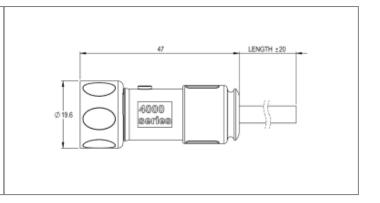

// Product Description:

- O Pre-Wired Flex Patch Cord Connector
- SPE T1 interface within 4000 Series Buccaneer housing to blunt cut cable
- O 3m cable length
- 26 AWG cable gauge

- Sealing caps available separately to maintain IP rating of unmated connectors
- Mates with PXPSPE4032 and PXPSPE4033 panel mounting connectors
- O Connector interfaces compliant with IEC 63171-6
- Cable compliant with IEC 61156-12

// General Information:

 Product Display Title:
 SPE Patch Cord Assembly

 Product Family:
 Circular Data Connectors

 Product Series:
 4000 Series - SPE

 Body Colour:
 Black

 Body Material:
 Polycarbonate/Polybutylene Terephthalate (PC/PBT)

 Polycarbonate/Polybutylene
 Polycarbonate/Polybutylene

Body Material Type:Plastic BodyCable Length:3mContact Type:Plug ContactCoupling Type:Bayonet LockCurrent Max:4A

Data Cable Type: 26 AWG SPE Cable - Blunt-Cut to Sealed Plug

Diameter Over Coupling Ring Mm: 19.7mm

Ethernet Category: 10BASE-T1L

Flamability Rating: UL94V-0

Function: Patch Cord Cable Assembly Ip Rating: IP66, IP67, IP74

Max Operating Temperature: +85°C
Min Operating Temperature: -30°C
Number Of Contacts: 2 Contacts
Rohs Compliant: Yes
Voltage Max: 60V

// Product PDF Links 4000 Series SPE connectors product...



Click Here To Contact Us