
PXPTPU05RAF03ACL010PUR Datasheet bulgin

Product Name // M5 Series A Code TPU Right-Angle Overmould Flex Cable Connector 3 Contact Socket PreWired With 1M PUR Jacket Cable



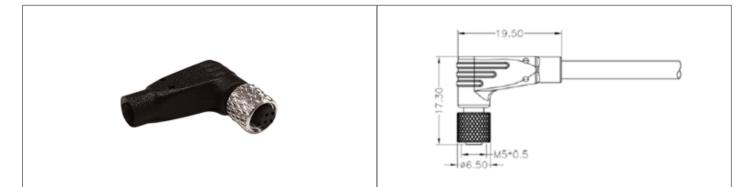

// Product Description:

- M5 Series Right-Angle Overmould Flex Body Connectors
- Water and dustproof to IP67 when mated with compatible connector
- O A Code
- O Pin or Socket

- O 3, 4 Contact
- Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- Mate with M5 Series Inline Body and Panel Mount Connectors, depending on part code

// General Information:

Product Display Title: M5 Series Right-Angle Overmould Flex Body Connectors

Product Family: Circular Automation Connectors

Product Series: M5 Series
Approvals: CSA, UL

Body Material: TPU
Cable Length: 1m

Contact Type: Socket Contact

Coupling Type:ScrewCurrent Max:1A

 Diameter Over Coupling Ring Mm:
 6.5mm

 Function:
 Right Angle Flex Connector Single Ended Cable

Ip Rating:

IP67

Max Operating Temperature:

Min Operating Temperature:

-25°C

Number Of Contractor

2 Contractor

3 Contractor

3 Contractor

4 Stating:

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

18977

 Number Of Contacts:
 3 Contacts

 Pin Layout Code:
 A Code

 Sheath Material:
 PUR

 Thread Size:
 M5 x 0.5

 Voltage Max:
 60V





1