
PXPTPU08FIM03ACL100PUR Datashee



Product Name // M8 Series A Code TPU In-Line Overmould Flex Cable Connector 3 Contact Pins Pre-Wired With 10M **PUR Jacket Cable**



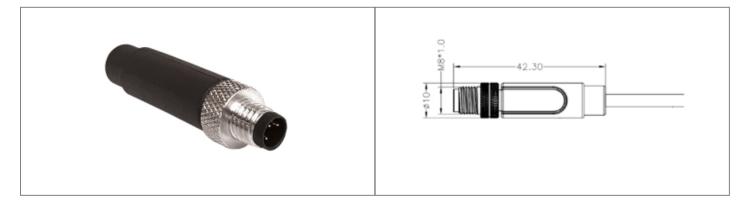

// Product Description:

- 0 M8 Series In-Line Overmould Flex Body Connectors
- 0 Water and dustproof to IP67 when mated with compatible connector
- Pin only

- Ω. 3, 4, 5 Contact (3, 4 Contact are A Code, 5 Contact are B Code)
- Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- Mate with M8 Series Flex Body and Panel Mount Connectors

// General Information:

Product Display Title: M8 Series In-Line Overmould Flex Body Connectors

Product Family: Circular Automation Connectors

Product Series: M8 Series

CSA, ENEC, UL, VDE Approvals: **Body Material: TPU**

Cable Length: 10m Contact Type: Plug Contact Coupling Type: Screw **Current Max:** ЗА

Diameter Over Coupling Ring Mm: 12.5mm

Inline Connector Single Ended Cable Function: Ip Rating: IP67 +80°C Max Operating Temperature:

Min Operating Temperature: -25°C **Number Of Contacts:** 3 Contacts Pin Layout Code: A Code Sheath Material: PUR Thread Size: M8 x 1

// Product PDF Links M8 Series automation connectors.. // Product 3D CAD Model Links PXPTPU08FIM03ACL100PUR3D CAD Mode

Click Here To Contact Us

60V

Voltage Max: