
PXPTPU12FIM04DCL010PUR Datashee

Product Name // M12 Series D Code TPU In-Line **Overmould Flex Cable Connector 4 Contact Pins Pre-Wired** With 1M PUR Jacket Cable



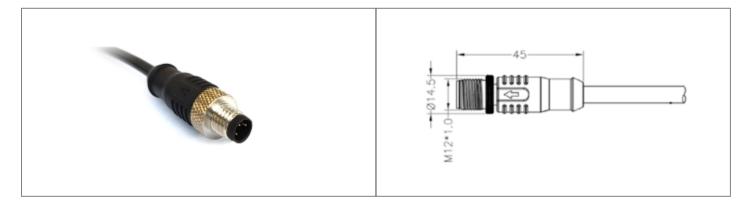

// Product Description:

- 0 M12 Series In-Line Overmould Flex Body Connectors
- 0 Water and dustproof to IP67 when mated with compatible connector
- 0 Pin only
- O 3, 4, 5, 8, 12 Contact (3, 8, 12 Contact are A Code, 4 Contact are choice of A Code or D Code, 5 Contact are choice of A Code or B Code)
- Overmould cable Termination with choice of lead lengths and choice of PVC or PUR jacket cable, depending on part code
- O Choice of Sealing Caps available separately to maintain IP rating of unmated connectors
- Mate with M12 Series Flex Body and Panel Mount Connectors

General Information:

Product Display Title: M12 Series In-Line Overmould Flex Body Connectors

Product Family: Product Series: M12 Series

Circular Automation Connectors

TPU **Body Material:**

Cable Length: 1m Contact Type: Plug Contact Coupling Type: Screw Current Max: 4A

Diameter Over Coupling Ring Mm: Inline Connector Single Ended Cable

Ip Rating: **IP67** +80°C Max Operating Temperature: -25°C Min Operating Temperature: **Number Of Contacts:** 4 Contacts D Code Pin Layout Code: Sheath Material: PUR Thread Size: M12 x 1

// Product PDF Links M12 Series automation connectors. // Product 3D CAD Model Links PXPTPU12FIM04DCL010PUR3D CAD Mo

20mm

250V

Voltage Max:

1