
## PXPTPU78FBF04ASTM22 Datasheet



## Product Name // 4 Contacts 7/8" Flex Body Female Connector



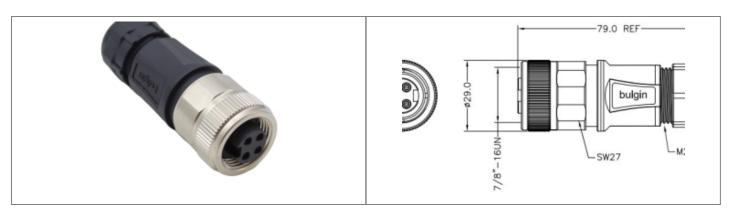

## // Product Description:

- 4 Contacts 7-8" Flex Body Female Connector
- O IP67 rated when mated
- Mechanical Cycles >100

- Operating Temperature -25°C to +85°C
- O Rated Voltage 300 V
- O ROHS compliance

## // General Information:

Product Display Title:7/8" Flex Body Female ConnectorProduct Family:Circular Automation Connectors

Product Series: 7/8" Series

Connection Method:ScrewContact Pin Material:Phosphor bronze gold plated 1u"

Min Coupling Torque:

Max Coupling Torque:

0.4Nm

0.8Nm

Contact Type:Socket ContactCurrent Max:9ADurability:>100 Cycles

Function: Flex Body Female Connector

Insulation Resistance: >100MOhm
Ip Rating: IP67

Max Cable Entry Size: 12mm
Min Cable Entry Size: 6mm
Max Operating Temperature: +85°C

Min Operating Temperature: -25°C

Nominal Cross Sectional Area Mm2: 1.5mm2

Nominal Cross Sectional Area Mm2: 1.5mm2

Number Of Contacts: 4 Contacts

Pin Layout Code: A Code

Rohs Compliant: Yes
Thread Size: M22
Voltage Max: 300V

// Product 3D CAD Model Links

78 Series Circular connectors... PXPTPU78FBF04ASTM223D CAD Model

// Product PDF Links