
PXPTPU78RAM03ASTM22 Datasheet



Product Name // 3 Contacts 7/8" Right Angled Male Connector





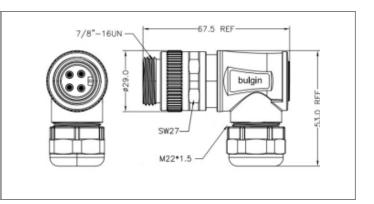

// Product Description:

- 3 Contacts 7-8" Right Angled Male Connector
- 0 IP67 rated when mated
- O Mechanical Cycles >100

- 0 Operating Temperature -25°C to +85°C
- 0 Rated Voltage 300 V
- ROHS compliance

// General Information:

Product Display Title: 7/8" Right Angled Male Connector Product Family: Circular Automation Connectors

7/8" Series **Product Series:**

Connection Method: Screw Contact Pin Material: Brass gold plated 1u"

Min Coupling Torque: 0.4Nm Max Coupling Torque: 0.8Nm

Contact Type: Plug Contact **Current Max:** 12A Durability: >100 Cycles

Function: Right Angled Male Connector >100MOhm Insulation Resistance:

Ip Rating: IP67 Max Cable Entry Size: 12mm

Min Cable Entry Size: 6mm Max Operating Temperature: +85°C Min Operating Temperature: -25°C

1.5mm2 Nominal Cross Sectional Area Mm2: 3 Contacts

Number Of Contacts: Pin Layout Code: A Code **Rohs Compliant:** Yes Thread Size: M22 300V Voltage Max:







