
# PXPTPU78RAM03ASTM22 Datasheet

## Product Name // 3 Contacts 7/8" Right Angled Male Connector

View Product Page



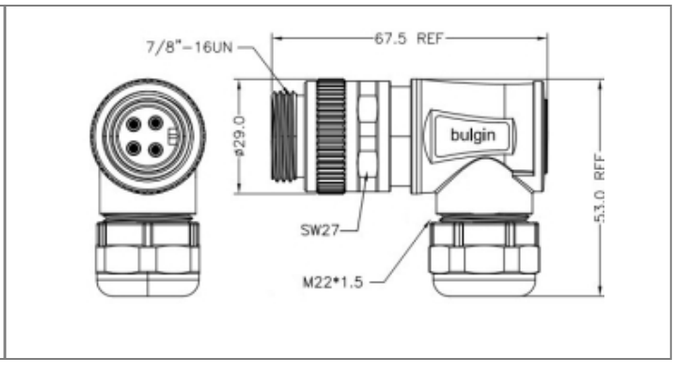


## // Product Description:

- 3 Contacts 7-8" Right Angled Male Connector
- IP67 rated when mated
- Mechanical Cycles >100
- Operating Temperature -25°C to +85°C
- Rated Voltage 300 V
- ROHS compliance

## // General Information:

| | |
|---|---|
| **Product Display Title:** | 7/8" Right Angled Male Connector |
| **Product Family:** | Circular Automation Connectors |
| **Product Series:** | 7/8" Series |
| **Connection Method:** | Screw |
| **Contact Pin Material:** | Brass gold plated 1u" |
| **Min Coupling Torque:** | 0.4Nm |
| **Max Coupling Torque:** | 0.8Nm |
| **Contact Type:** | Plug Contact |
| **Current Max:** | 12A |
| **Durability:** | >100 Cycles |
| **Function:** | Right Angled Male Connector |
| **Insulation Resistance:** | >100MOhm |
| **Ip Rating:** | IP67 |
| **Max Cable Entry Size:** | 12mm |
| **Min Cable Entry Size:** | 6mm |
| **Max Operating Temperature:** | +85°C |
| **Min Operating Temperature:** | -25°C |
| **Nominal Cross Sectional Area Mm2:** | 1.5mm2 |
| **Number Of Contacts:** | 3 Contacts |
| **Pin Layout Code:** | A Code |
| **Rohs Compliant:** | Yes |
| **Thread Size:** | M22 |
| **Voltage Max:** | 300V |

### // Product PDF Links

78 Series Circular connectors...

### // Product 3D CAD Model Links

PXPTPU78RAM03ASTM223D CAD Model