
PXPTPU78RAM04ASTM22 Datasheet



Product Name // 4 Contacts 7/8" Right Angled Male Connector





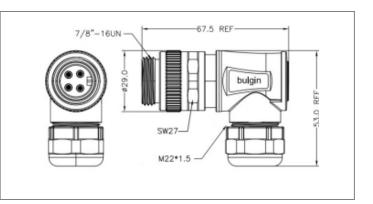

// Product Description:

- 4 Contacts 7-8" Right Angled Male Connector
- 0 IP67 rated when mated
- O Mechanical Cycles >100

- 0 Operating Temperature -25°C to +85°C
- 0 Rated Voltage 300 V
- ROHS compliance

// General Information:

Product Display Title:

Product Family: **Product Series:**

Connection Method:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque:

Contact Type: **Current Max:**

Durability:

Function:

Insulation Resistance:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size: Max Operating Temperature:

Min Operating Temperature:

Nominal Cross Sectional Area Mm2: **Number Of Contacts:**

Pin Layout Code: **Rohs Compliant:**

Thread Size: Voltage Max: 7/8" Right Angled Male Connector

Circular Automation Connectors

7/8" Series

Screw

Brass gold plated 1u"

0.4Nm

0.8Nm

Plug Contact

9A

>100 Cycles

Right Angled Male Connector

>100MOhm

IP67 12mm

6mm

+85°C

-25°C

1.5mm2 4 Contacts

A Code

Yes

M22

300V

// Product PDF Links



// Product 3D CAD Model Links



PXPTPU78RAM04ASTM223D CAD Model