
PXS410/02/08S Datasheet



Product Name // 400 Series Smart Connector, Socket, Overmould pre-wired Connector, 02 M Cable



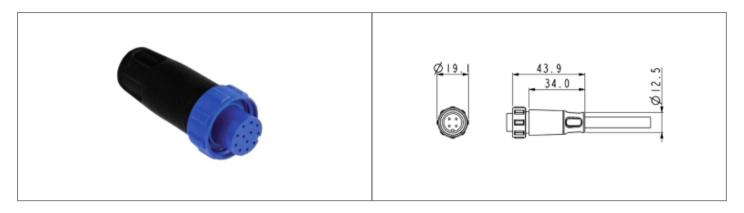

// Product Description:

- Q 400 Series Smart Overmould Prewired Connectors
- O 1 wire EEPROM chip
- Water and dustproof to IP67 when mated with compatible connector
- O Pin or Socket
- Q 4, 6, 8, 10 & 12 Contact
- Choice of Sealing Caps available separately to maintain IP rating of unmated connectors

// General Information:

Product Display Title: 400 Series Smart Overmould Prewired Connectors

Product Family:Circular Power ConnectorsProduct Series:400 Series BuccaneerBody Material:Polyurethane (PU)

Cable Length:2mContact Type:Socket Contact

Contact Type:Socket ContactCoupling Type:ScrewCurrent Max:5A

Flamability Rating: UL94V-HB
Function: Flax Smart Connector Single Ended Cabl

Function: Flex Smart Connector Single Ended Cable

Ip Rating: IP67

Max Operating Temperature: #85°C

Max Operating Temperature:+85°CMin Operating Temperature:-20°CNumber Of Contacts:8 ContactsVoltage Max:125V

// Product PDF Links 400 Series Technical Product Data

