
PXS410/02/10S Datasheet



Product Name // 400 Series Smart Connector, Socket, Overmould pre-wired Connector, 02 M Cable

🚯 View Product Page

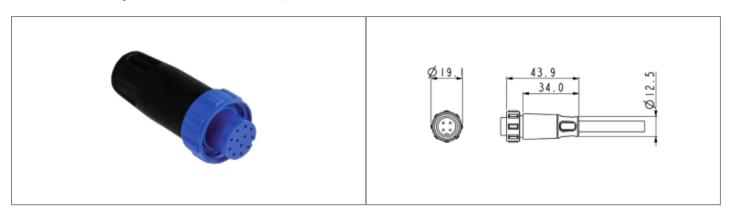

// Product Description:

- O 400 Series Smart Overmould Prewired Connectors
- O 1 wire EEPROM chip
- O Water and dustproof to IP67 when mated with compatible connector
- O Pin or Socket
- O 4, 6, 8, 10 & 12 Contact
- O Choice of Sealing Caps available separately to maintain IP rating of unmated connectors

// General Information:

Product Display Title: Product Family: Product Series: Body Material: Cable Length: Contact Type: Coupling Type: Current Max: Flamability Rating: Function: Ip Rating: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max: 400 Series Smart Overmould Prewired Connectors Circular Power Connectors 400 Series Buccaneer Polyurethane (PU) 2m Socket Contact Screw 1A UL94V-HB Flex Smart Connector Single Ended Cable IP67 +85°C -20°C 10 Contacts 50V

// Product PDF Links

400 Series Technical Product Data

// Product 3D CAD Model Links

PXS410/02/10S3D CAD Model