
PXS410/03/04P Datasheet



Product Name // 400 Series Smart Connector, Plug, Overmould pre-wired Connector, 03 M Cable



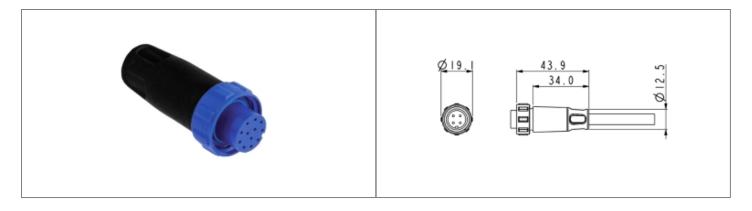

// Product Description:

- O 400 Series Smart Overmould Prewired Connectors
- O 1 wire EEPROM chip
- Water and dustproof to IP67 when mated with compatible connector
- O Pin or Socket
- O 4, 6, 8, 10 & 12 Contact
- Choice of Sealing Caps available separately to maintain IP rating of unmated connectors

// General Information:

Product Display Title: 400 Series Smart Overmould Prewired Connectors

Product Family:Circular Power ConnectorsProduct Series:400 Series BuccaneerBody Material:Polyurethane (PU)Contact Type:Plug Contact

Coupling Type: Screw
Current Max: 5A

Flamability Rating: UL94V-HB
Function: Flex Smart Connector Single Ended Cable

Ip Rating:

Max Operating Temperature:

#85°C

Min Operating Temperature:
-20°C
Number Of Contacts:
4 Contacts
Voltage Max:
125V

// Product PDF Links



// Product 3D CAD Model Links

PXS410/03/04P3D CAD Model