
# PXS410/03/12S Datasheet



## Product Name // 400 Series Smart Connector, Socket, Overmould pre-wired Connector, 03 M Cable

View Product Page

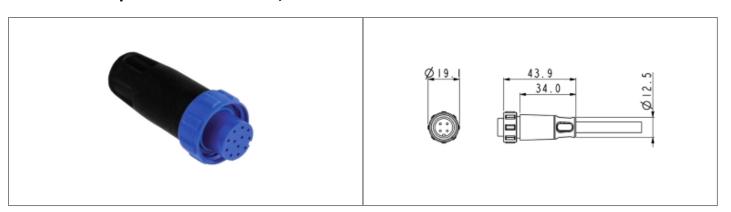

#### // Product Description:

- O 400 Series Smart Overmould Prewired Connectors
- 0 1 wire EEPROM chip
- O Water and dustproof to IP67 when mated with compatible connector
- O Pin or Socket
- O 4, 6, 8, 10 & 12 Contact
- O Choice of Sealing Caps available separately to maintain IP rating of unmated connectors

### // General Information:

Product Display Title: Product Family: Product Series: Body Material: Contact Type: Coupling Type: Current Max: Flamability Rating: Function: Ip Rating: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max: 400 Series Smart Overmould Prewired Connectors Circular Power Connectors 400 Series Buccaneer Polyurethane (PU) Socket Contact Screw 1A UL94V-HB Flex Smart Connector Single Ended Cable IP67 +85°C -20°C 12 Contacts 50V

#### // Product PDF Links

400 Series Technical Product Data

// Product 3D CAD Model Links

PXS410/03/12S3D CAD Model