


PXS410/05/08P Datasheet

**Product Name // 400 Series Smart Connector, Plug,
Overmould pre-wired Connector, 05 M Cable**

 [View Product Page](#)

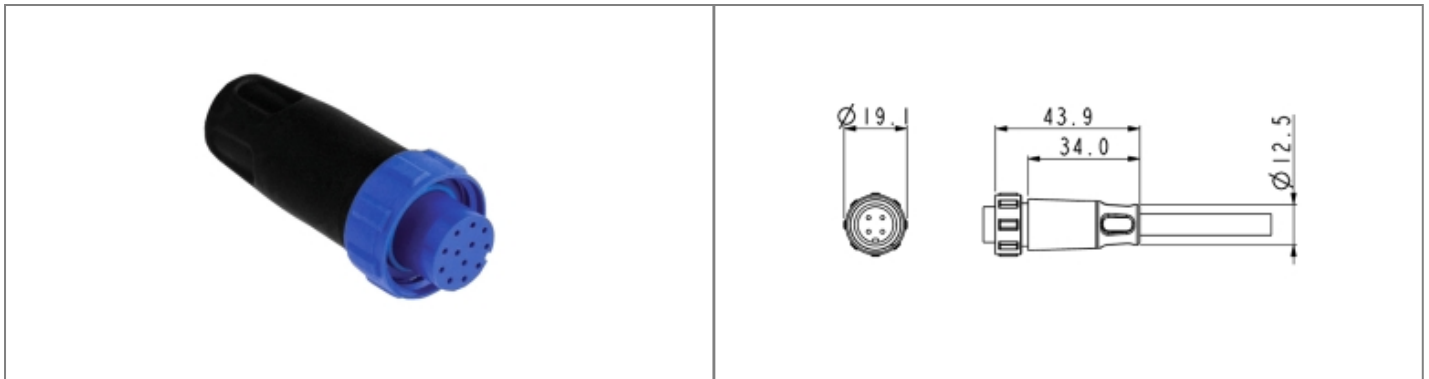

// Product Description:

- | | |
|--|---|
|  400 Series Smart Overmould Prewired Connectors |  Pin or Socket |
|  1 - wire EEPROM chip |  4, 6, 8, 10 & 12 Contact |
|  Water and dustproof to IP67 when mated with compatible connector |  Choice of Sealing Caps available separately to maintain IP rating of unmated connectors |

// General Information:

Product Display Title:	400 Series Smart Overmould Prewired Connectors
Product Family:	Circular Power Connectors
Product Series:	400 Series Buccaneer
Body Material:	Polyurethane (PU)
Contact Type:	Plug Contact
Coupling Type:	Screw
Current Max:	5A
Flamability Rating:	UL94V-HB
Function:	Flex Smart Connector Single Ended Cable
Ip Rating:	IP67
Max Operating Temperature:	+85°C
Min Operating Temperature:	-20°C
Number Of Contacts:	8 Contacts
Voltage Max:	125V

// Product PDF Links

 [400 Series Technical Product Data](#)

// Product 3D CAD Model Links

 [PXS410/05/08P3D CAD Model](#)