
# PXV0739/S Datasheet



## Product Name // Vitalis Buccaneer Flex Range (6 Contact)

View Product Page



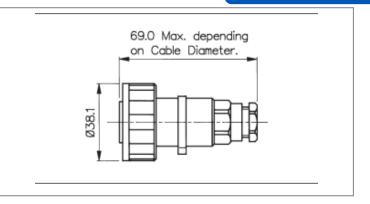

#### // Product Description:

- PXV0739/S provides a PCF reduction of 9.0 kg CO<sub>2</sub>e per 100 units compared to the equivalent Standard Series Buccaneer part number
- 0 Flex Cable Connector
- 0 Water and dustproof to IP68 when mated with compatible connectors
- 0 Socket contacts
- 0 6 pole
- 0 Screw contacts, supplied fitted

- O 6mm-8mm diameter cable acceptance
- 0 Cable Glands for differing cable diameters available separately individually or in packs
- 0 Cable Support accessory 12237/R available separately
- 0 PXV0734 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mates with Standard Vitalis Series (PXV) and Standard Series (PX) Buccaneer Inline, Panel Mount and Flange Mount Connectors

### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** Approvals:

**Body Colour:** 

**Body Material:** 

**Body Material Type:** 

Contact Type:

Coupling Type:

**Current Max:** 

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour:

Ip Rating: Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg:

Min Contact Accomodation Awg:

Max Contact Accomodation Mm2:

Min Contact Accomodation Mm2: Max Operating Temperature:

Min Operating Temperature:

**Number Of Contacts:** 

**Rohs Compliant:** 

Voltage Max:

Vitalis Buccaneer Flex Range (6 Contact)

Circular Power Connector

Standard Vitalis Buccaneer

UL, VDE

Black

Polyamide (PA)- Glass Filled

Plastic Body Socket Contact

Screw

3A, 5A 38.1mm

UL94HB

Flex Cable Connector

Black Insert And Gland Nut

IP68, IP69K

8mm 6mm

16AWG

17AWG

1.5mm2

1mm2

+70°C

-20°C

6 Contacts

Yes 277V

## // Product PDF Links



Standard Vitalis Buccaneer Product...

#### // Product 3D CAD Model Links



PXV0739/S3D CAD Model