
PXV0739/S/07 Datasheet



Product Name // Vitalis Buccaneer Flex Range (6 Contact)

View Product Page



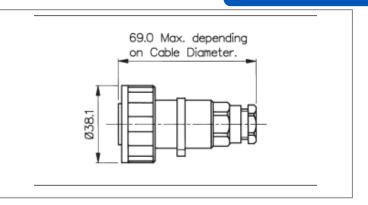

// Product Description:

- PXV0739/S/07 provides a PCF reduction of 9.0 kg CO₂e per 100 units compared to the equivalent Standard Series Buccaneer part number
- 0 Flex Cable Connector
- 0 Water and dustproof to IP68 when mated with compatible connectors
- 0 Socket contacts
- 0 6 pole
- 0 Screw contacts, supplied fitted

- 0 7mm-9mm diameter cable acceptance
- 0 Cable Glands for differing cable diameters available separately individually or in packs
- 0 Cable Support accessory 12237/R available separately
- 0 PXV0734 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mates with Standard Vitalis Series (PXV) and Standard Series (PX) Buccaneer Inline, Panel Mount and Flange Mount Connectors

// General Information:

Product Display Title:

Product Family:

Product Series: Approvals:

Body Colour:

Body Material:

Body Material Type:

Contact Type:

Coupling Type: **Current Max:**

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour:

Ip Rating: Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg:

Min Contact Accomodation Awg:

Max Contact Accomodation Mm2: Min Contact Accomodation Mm2:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Rohs Compliant:

Voltage Max:

Vitalis Buccaneer Flex Range (6 Contact)

Circular Power Connector

Standard Vitalis Buccaneer

UL, VDE

Black

Polyamide (PA)- Glass Filled

Plastic Body Socket Contact

Screw

5A

38.1mm

UL94HB

Flex Cable Connector Black Insert And Gland Nut

IP68, IP69K

9mm 7mm

16AWG

17AWG

1.5mm2

1mm2

+70°C

-20°C 6 Contacts

Yes

277V

// Product PDF Links

Standard Vitalis Buccaneer Product...

// Product 3D CAD Model Links

PXV0739/S/073D CAD Model