
# **RF240A2JEGADGB** Datasheet



View Product Page

## Product Name // 2.4mm Jack Straight 2 Hole Flange RF

#### Connector

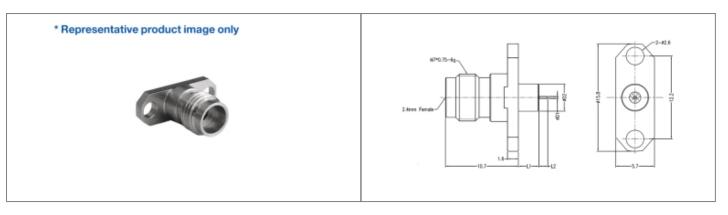

#### // Product Description:

- O 2.4mm Jack Straight 2 Hole Flange RF Connector
- O Maximum Voltage: 150V
- Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 50GHz
- O VSWR:

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper


### // General Information:

Product Display Title: **Product Family: Product Series:** Body Length: **Body Material:** Centre Contact Retention Force: Contact Pin Material: Min Coupling Torque: Max Coupling Torque: Dielectric Withstanding Voltage: Durability: Flange Mount Length: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Voltage Max: Vswr:

2.40mm Series Pin with Extended PTFE 2 Hole Flange Radio Frequency Connectors 2.40mm Series 10.70mm Stainless Steel Passivation >20N Beryllium Copper 0.80Nm 1.10Nm >500V >500 cycles 15.80mm Female Flange Mount RF Connector 500hm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 12.20mm 0GHz 50GHz 0.30mm 1.50mm 4.00mm 3.00mm 150V <1.30

#### // Product PDF Links

2.40mm Series Product Datasheet



RF240A2JEGADGB3D CAD Model