RF240A2JEGB Datasheet




Product Name // 2.4mm Jack Straight 2 Hole Flange RF Connector



* Representative product image only



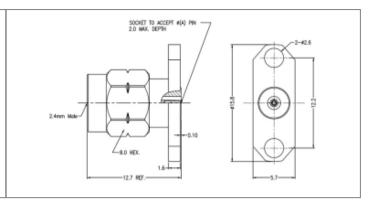

// Product Description:

- O 2.4mm Jack Straight 2 Hole Flange RF Connector
- 0 Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 50GHz
- 0 VSWR:

- Ò Dielectric withstanding Voltage: >500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force: Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Vswr:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter: Voltage Max:

2.40mm Series Socket 2 Hole Flange

Radio Frequency Connectors

2.40mm Series

10.80mm Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm

1.10Nm >500V

>500 cycles

15.80mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 12.20mm 0GHz 50GHz 0.30mm

150V <1.30

// Product PDF Links



// Product 3D CAD Model Links



RF240A2JEGB3D CAD Model

1