RF240A2JEGCCBG Datasheet




Product Name // 2.4mm Jack Straight 2 Hole Flange RF Connector

View Product Page

* Representative product image only



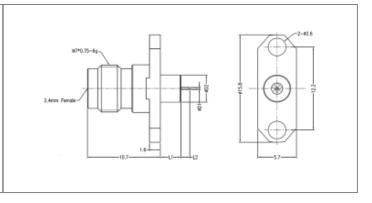

// Product Description:

- 0 2.4mm Jack Straight 2 Hole Flange RF Connector
- 0 Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 50GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family: Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque: Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature:

Mount Hole Distance: Min Operating Frequency:

Max Operating Frequency: Pin Diameter: Pin Length:

Ptfe Diameter: Ptfe Length: Voltage Max: Vswr:

2.40mm Series Pin with Extended PTFE 2 Hole Flange

Radio Frequency Connectors

2.40mm Series

10.80mm

Stainless Steel Passivation

Beryllium Copper

0.80Nm 1.10Nm

>500V

>500 cycles

15.80mm

Female Flange Mount RF Connector

500hm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C

-40°C 12.20mm

0GHz

50GHz

0.60mm 1.27mm

2.00mm

6.35mm

150V <1.30

// Product PDF Links

2.40mm Series Product Datasheet

// Product 3D CAD Model Links

RF240A2JEGCCBG3D CAD Model