RF240A2JEGDO Datasheet




Product Name // 2.4mm Jack Straight 2 Hole Flange RF Connector

View Product Page

* Representative product image only



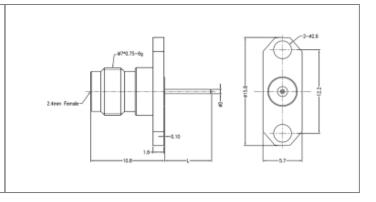

// Product Description:

- 2.4mm Jack Straight 2 Hole Flange RF Connector
- O Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 50GHz
- 0 VSWR:

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque: Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function:

Impedance: Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature:

Mount Hole Distance: Min Operating Frequency:

Max Operating Frequency: Pin Diameter: Pin Length:

Voltage Max: Vswr:

2.40mm Series Pin without Extended PTFE 2 Hole Flange

Radio Frequency Connectors

2.40mm Series

10.80mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm

1.10Nm >500V

>500 cycles

15.80mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C

-40°C

12.20mm 0GHz

50GHz

0.64mm

10.00mm

150V

<1.30

// Product PDF Links



2.40mm Series Product Datasheet

// Product 3D CAD Model Links



RF240A2JEGDO3D CAD Model