RF240A2JEGII Datasheet




Product Name // 2.4mm Jack Straight 2 Hole Flange RF Connector

View Product Page

* Representative product image only



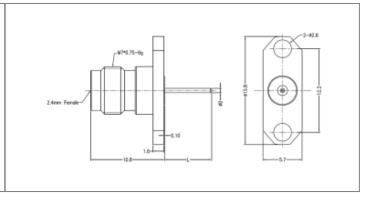

// Product Description:

- 2.4mm Jack Straight 2 Hole Flange RF Connector
- O Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 50GHz
- 0 VSWR:

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

General Information:

Product Display Title:

Product Family: Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Voltage Max: Vswr:

2.40mm Series Pin without Extended PTFE 2 Hole Flange

Radio Frequency Connectors

2.40mm Series

10.80mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm

1.10Nm >500V

>500 cycles

15.80mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm


UNFILLED ULTEM 1000/PEI

+85°C -40°C 12.20mm 0GHz 50GHz 1.00mm 5.50mm

150V <1.30

// Product PDF Links







RF240A2JEGII3D CAD Model