# **RF240A2JEGJJ Datasheet**




# Product Name // 2.4mm Jack Straight 2 Hole Flange RF Connector

View Product Page

#### \* Representative product image only



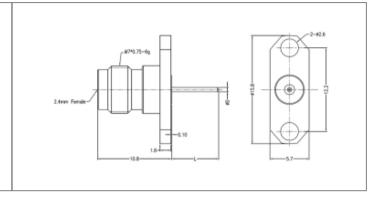

#### // Product Description:

- O 2.4mm Jack Straight 2 Hole Flange RF Connector
- Maximum Voltage: 150V
- C Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 50GHz
- **O** VSWR: <1.30

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### // General Information:

Product Display Title:

Product Family:

Product Series: Is Vitalis:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque: Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function:

Impedance:
Insulation Resistance:

Insulator:

Max Operating Temperature:
Min Operating Temperature:

Mount Hole Distance:
Min Operating Frequency:
Max Operating Frequency:

Pin Diameter: Pin Length: Voltage Max: Vswr: 2.40mm Series Pin without Extended PTFE 2 Hole Flange

Radio Frequency Connectors

2.40mm Series

No 10.80

10.80mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm 1.10Nm

>500V

>500 cycles

15.80mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI +85°C

-40°C 12.20mm 0GHz 50GHz 1.04mm 6.34mm 150V

<1.30

## // Product PDF Links



## // Product 3D CAD Model Links



RF240A2JEGJJ3D CAD Model