# RF240A2PEGB Datasheet




# Product Name // 2.4mm Plug Straight 2 Hole Flange RF Connector



#### \* Representative product image only



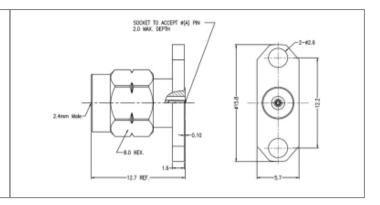

## // Product Description:

- O 2.4mm Plug Straight 2 Hole Flange RF Connector
- 0 Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 50GHz
- 0 VSWR: <1.30

- Ò Dielectric withstanding Voltage: >500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

### // General Information:

**Product Display Title: Product Family:** 

**Product Series:** 

Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

**Durability:** 

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter:

Voltage Max: Vswr:

2.40mm Series Socket 2 Hole Flange

Radio Frequency Connectors

2.40mm Series 12.70mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm

1.10Nm >500V

>500 cycles

15.80mm

Male Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C

12.20mm 0GHz

50GHz 0.30mm 150V

<1.30

### // Product PDF Links



#### // Product 3D CAD Model Links



RF240A2PEGB3D CAD Model