
# **RF240A4JCCA** Datasheet



## Product Name // 2.4mm Jack Straight 4 Hole Flange RF

### 🚯 View Product Page

Connector

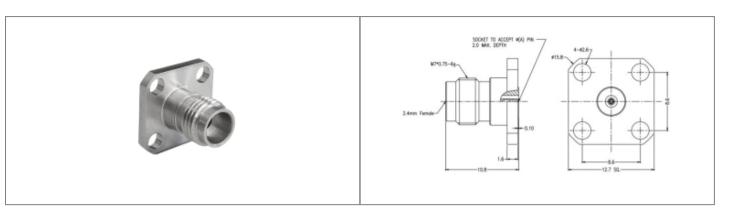

### // Product Description:

- O 2.4mm Jack Straight 4 Hole Flange RF Connector
- O Maximum Voltage: 150V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 50GHz
- O VSWR:

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### // General Information:

**Product Display Title: Product Family: Product Series:** Body Length: **Body Material:** Centre Contact Retention Force: Contact Pin Material: Min Coupling Torque: Max Coupling Torque: **Dielectric Withstanding Voltage:** Durability: Flange Mount Length: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter: Voltage Max: Vswr:

2.40mm Series Socket 4 Hole Flange **Radio Frequency Connectors** 2.40mm Series 10.80mm Stainless Steel Passivation >20N Beryllium Copper 0.80Nm 1.10Nm >500V >500 cycles 12.70mm Female Flange Mount RF Connector 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 8.60mm 0GHz 50GHz 0.23mm 150V <1.30

#### // Product PDF Links

2.40mm Series Product Datasheet

// Product 3D CAD Model Links

RF240A4JCCA3D CAD Model