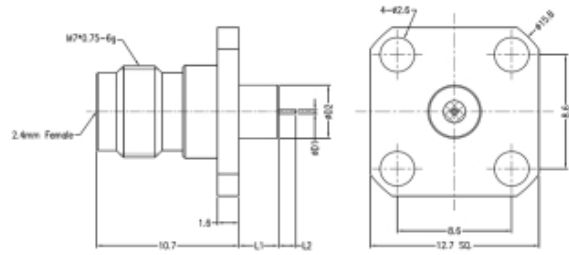


Product Name // 2.4mm Jack Straight 4 Hole Flange RF Connector
[View Product Page](#)

* Representative product image only


// Product Description:

- ⊕ 2.4mm Jack Straight 4 Hole Flange RF Connector
- ⊕ Maximum Voltage: 150V
- ⊕ Temperature range: -40°C to +85°C
- ⊕ Frequency range: 0GHz - 50GHz
- ⊕ VSWR: <1.30
- ⊕ Dielectric withstanding Voltage: >500V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

// General Information:

Product Display Title:	2.40mm Series Pin with Extended PTFE 4 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	2.40mm Series
Body Length:	10.70mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>500V
Durability:	>500 cycles
Flange Mount Length:	12.70mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	UNFILLED ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Mount Hole Distance:	8.60mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	50GHz
Pin Diameter:	0.30mm
Pin Length:	1.50mm
Ptfe Diameter:	4.00mm
Ptfe Length:	3.00mm
Voltage Max:	150V
Vswr:	<1.30

// Product PDF Links
[2.40mm Series Product Datasheet](#)
// Product 3D CAD Model Links
[RF240A4JCCADGB3D CAD Model](#)

 Have a question or project enquiry
 you'd like to talk to us about?

[Click Here To Contact Us](#)