# RF240A4JCCGM Datasheet




# Product Name // 2.4mm Jack Straight 4 Hole Flange RF Connector



#### \* Representative product image only



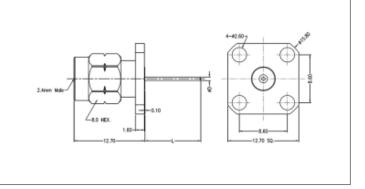

## // Product Description:

- 2.4mm Jack Straight 4 Hole Flange RF Connector
- O Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 50GHz
- 0 VSWR:

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

### **General Information:**

**Product Display Title:** 

**Product Family:** 

**Product Series:** Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Voltage Max: Vswr:

2.40mm Series Pin without Extended PTFE 4 Hole Flange

Radio Frequency Connectors

2.40mm Series

10.80mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm

1.10Nm >500V

>500 cycles

12.70mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 8.60mm 0GHz 50GHz

0.86mm 8.75mm 150V

<1.30

// Product PDF Links



// Product 3D CAD Model Links



RF240A4JCCGM3D CAD Model