
RF240A4JCCJJ Datasheet



View Product Page

Product Name // 2.4mm Jack Straight 4 Hole Flange RF

Connector

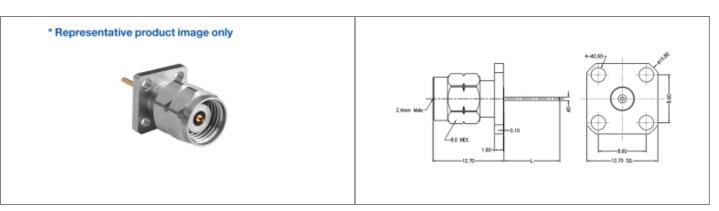

// Product Description:

- O 2.4mm Jack Straight 4 Hole Flange RF Connector
- O Maximum Voltage: 150V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 50GHz
- O VSWR:

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper


// General Information:

Product Display Title:
Product Family:
Product Series:
Body Length:
Body Material:
Centre Contact Retention Force:
Contact Pin Material:
Min Coupling Torque:
Max Coupling Torque:
Dielectric Withstanding Voltage:
Durability:
Flange Mount Length:
Function:
Impedance:
Insulation Resistance:
Insulator:
Max Operating Temperature:
Min Operating Temperature:
Mount Hole Distance:
Min Operating Frequency:
Max Operating Frequency:
Pin Diameter:
Pin Length:
Voltage Max:
Vswr:

2.40mm Series Pin without Extended PTFE 4 Hole Flange Radio Frequency Connectors 2.40mm Series 10.80mm Stainless Steel Passivation >20N Beryllium Copper 0.80Nm 1.10Nm >500V >500 cycles 12.70mm Female Flange Mount RF Connector 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 8.60mm 0GHz 50GHz 1.04mm 6.34mm 150V <1.30

// Product PDF Links

2.40mm Series Product Datasheet



RF240A4JCCJJ3D CAD Model