RF240A4PCCB Datasheet




Product Name // 2.4mm Plug Straight 4 Hole Flange RF Connector



* Representative product image only



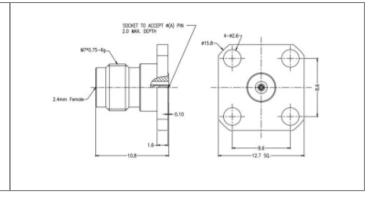

// Product Description:

- O 2.4mm Plug Straight 4 Hole Flange RF Connector
- 0 Maximum Voltage: 150V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 50GHz
- 0 VSWR: <1.30

- Ò Dielectric withstanding Voltage: >500V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family:

Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter:

Voltage Max: Vswr:

2.40mm Series Socket 4 Hole Flange

Radio Frequency Connectors

2.40mm Series

12.70mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm

1.10Nm

>500V

>500 cycles

12.70mm

Male Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI +85°C

-40°C

8.60mm

0GHz 50GHz

0.30mm

150V

<1.30

// Product PDF Links



// Product 3D CAD Model Links



RF240A4PCCB3D CAD Model