
## RF240A4PCCGM Datasheet



## Product Name // 2.4mm Plug Straight 4 Hole Flange RF Connector





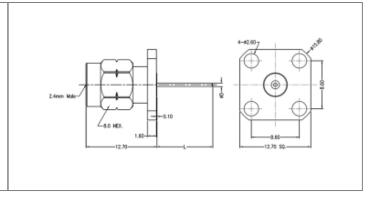

## // Product Description:

- 2.4mm Plug Straight 4 Hole Flange RF Connector
- O Maximum Voltage: 150V
- C Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 50GHz
- **O** VSWR: <1.30

- O Dielectric withstanding Voltage: >500V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

## // General Information:

**Product Display Title:** 

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:
Min Operating Temperature:
Mount Hole Distance:
Min Operating Frequency:
Max Operating Frequency:

Pin Diameter: Pin Length: Voltage Max: Vswr: 2.40mm Series Pin without Extended PTFE 4 Hole Flange

Radio Frequency Connectors

2.40mm Series

12.70mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm

1.10Nm >500V

>500 cycles

12.70mm

Male Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 8.60mm 0GHz 50GHz 0.86mm 8.75mm

<1.30

// Product PDF Links



// Product 3D CAD Model Links



RF240A4PCCGM3D CAD Model