
RF292A2JCCAL Datasheet



Product Name // 2.92mm Jack Straight 2 Hole Flange RF Connector





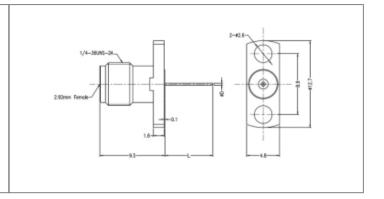

// Product Description:

- O 2.92mm Jack Straight 2 Hole Flange RF Connector
- Maximum Voltage: 250V
- C Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family: Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:

Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function:

Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Thread Size: Voltage Max: Vswr: 2.92mm Series Pin without Extended PTFE 2 Hole Flange

Radio Frequency Connectors

2.92mm Series

9.50mm

Stainless Steel Passivation

>20N

Beryllium Copper 0.80Nm

1.10Nm

>750V

>500 cycles 12.70mm

12.70mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

+85°C

-40°C 8.60mm

0GHz

40GHz

0.30mm

7.00mm 1/4 36UNS 2A

250V

<1.25

// Product PDF Links



// Product 3D CAD Model Links



RF292A2JCCAL3D CAD Model