RF292A2JCEDP Datasheet




Product Name // 2.92mm Jack Straight 2 Hole Flange RF Connector

View Product Page

* Representative product image only



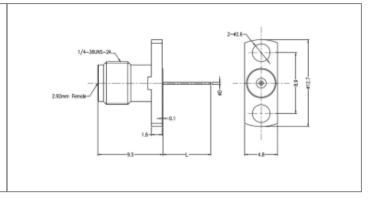

// Product Description:

- O 2.92mm Jack Straight 2 Hole Flange RF Connector
- Maximum Voltage: 250V
- C Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 40GHz
- **O** VSWR: <1.30

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque:
Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Thread Size: Voltage Max: Vswr: 2.92mm Series Pin without Extended PTFE 2 Hole Flange

Radio Frequency Connectors

2.92mm Series

9.50mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm 1.10Nm

>750V

>500 cycles

12.70mm

Female Flange Mount RF Connector

500hm >5000MOhm ULTEM 1000

+85°C -40°C

-40°C 8.90mm 0GHz 40GHz 0.64mm

10.92mm 1/4 36UNS 2A 250V

<1.30

// Product PDF Links



// Product 3D CAD Model Links



RF292A2JCEDP3D CAD Model