
RF292A2JDFADAA Datasheet



View Product Page

Product Name // 2.92mm Jack Straight 2 Hole Flange RF

Connector

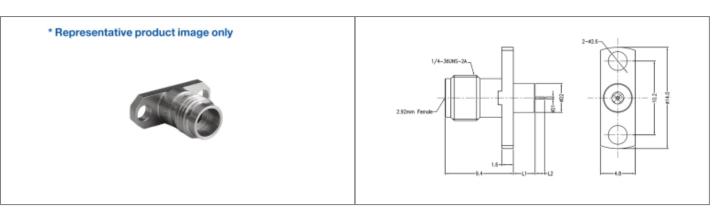

// Product Description:

- O 2.92mm Jack Straight 2 Hole Flange RF Connector
- O Maximum Voltage: 250V
- Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: **Product Family: Product Series:** Is Vitalis: Body Length: **Body Material:** Centre Contact Retention Force: **Contact Pin Material:** Min Coupling Torque: Max Coupling Torque: **Dielectric Withstanding Voltage:** Durability: Flange Mount Length: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Thread Size: Voltage Max: Vswr:

2.92mm Series Pin with Extended PTFE 2 Hole Flange Radio Frequency Connectors 2.92mm Series No 9.50mm Stainless Steel Passivation >20N Beryllium Copper 0.80Nm 1.10Nm >750V >500 cycles 14.00mm Female Flange Mount RF Connector 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 10.20mm 0GHz 40GHz 0.30mm 1.50mm 1.67mm 1.40mm 1/4 36UNS 2A 250V <1.30

// Product PDF Links

2.92mm Series Product Datasheet

// Product 3D CAD Model Links

RF292A2JDFADAA3D CAD Model