RF292A2JDFCCGH Datasheet




Product Name // 2.92mm Jack Straight 2 Hole Flange RF Connector

View Product Page

* Representative product image only



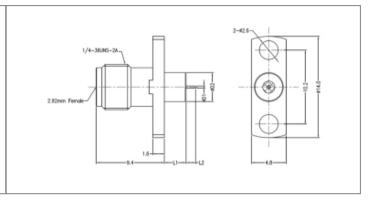

// Product Description:

- 0 2.92mm Jack Straight 2 Hole Flange RF Connector
- 0 Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 40GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature:

Min Operating Temperature:

Mount Hole Distance: Min Operating Frequency:

Max Operating Frequency:

Pin Diameter: Pin Length: Ptfe Diameter:

Ptfe Length: Thread Size:

Voltage Max: Vswr:

2.92mm Series Pin with Extended PTFE 2 Hole Flange

Radio Frequency Connectors

2.92mm Series

9.40mm

Stainless Steel Passivation

Beryllium Copper

0.80Nm 1.10Nm

>750V

>500 cycles

14.00mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C

-40°C 10.20mm

0GHz

40GHz

0.60mm 1.27mm

4.00mm

10.10mm

1/4 36UNS 2A

250V

<1.30

// Product PDF Links



2.92mm Series Product Datasheet

// Product 3D CAD Model Links



RF292A2JDFCCGH3D CAD Model