
## **RF292A2JDFES Datasheet**



# Product Name // 2.92mm Jack Straight 2 Hole Flange RF



#### Connector

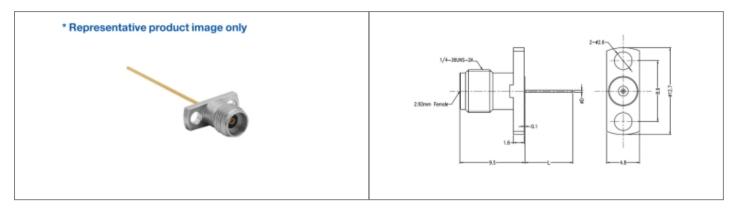

#### // Product Description:

- O 2.92mm Jack Straight 2 Hole Flange RF Connector
- Maximum Voltage: 250V
- C Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 40GHz
- O VSWR: <1.30

**Durability:** 

Insulator:

Vswr:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### // General Information:

**Product Display Title:** 2.92mm Series Pin without Extended PTFE 2 Hole Flange

**Product Family:** Radio Frequency Connectors

**Product Series:** 2.92mm Series

**Body Length:** 9.50mm

**Body Material:** Stainless Steel Passivation Centre Contact Retention Force: >20N

Contact Pin Material: Beryllium Copper Min Coupling Torque: 0.80Nm

Max Coupling Torque: 1.10Nm Dielectric Withstanding Voltage: >750V

Flange Mount Length: 14.00mm

Female Flange Mount RF Connector Function: Impedance: 50Ohm >5000MOhm Insulation Resistance:

Max Operating Temperature: +85°C -40°C Min Operating Temperature: 10.20mm Mount Hole Distance: Min Operating Frequency: 0GHz Max Operating Frequency: 40GHz

Pin Diameter: 0.75mm Pin Length: 30.00mm Thread Size: 1/4 36UNS 2A 250V Voltage Max:

### // Product PDF Links 2.92mm Series Product Datasheet



<1.30

>500 cycles

**ULTEM 1000** 

