## RF292A2JEGADAA Datasheet




## Product Name // 2.92mm Jack Straight 2 Hole Flange RF Connector

View Product Page

\* Representative product image only



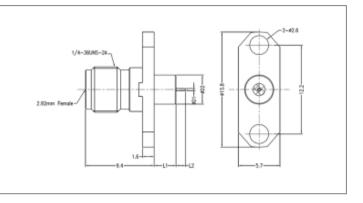

## // Product Description:

- 0 2.92mm Jack Straight 2 Hole Flange RF Connector
- 0 Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 40GHz
- 0 VSWR:

- Dielectric withstanding Voltage: >750V
- 0 Impedance: 500hm
- 0 Body Material: Stainless Steel Passivation
- 0 Contact Material: Beryllium Copper

## // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

**Body Length:** 

**Body Material:** 

**Centre Contact Retention Force:** 

Contact Pin Material:

Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

**Durability:** 

Flange Mount Length:

Function:

Impedance: Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency:

Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Thread Size: Voltage Max:

Vswr:

2.92mm Series Pin with Extended PTFE 2 Hole Flange

Radio Frequency Connectors

2.92mm Series

9.50mm

Stainless Steel Passivation

Beryllium Copper 0.80Nm

1.10Nm

>750V

>500 cycles

15.80mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 12.20mm 0GHz 40GHz 0.30mm 1.50mm

1.67mm 1.40mm

1/4 36UNS 2A

250V <1.30

// Product PDF Links

2.92mm Series Product Datasheet

// Product 3D CAD Model Links



RF292A2JEGADAA3D CAD Model