
RF292A2JEGCCGH Datasheet



View Product Page

Product Name // 2.92mm Jack Straight 2 Hole Flange RF

Connector

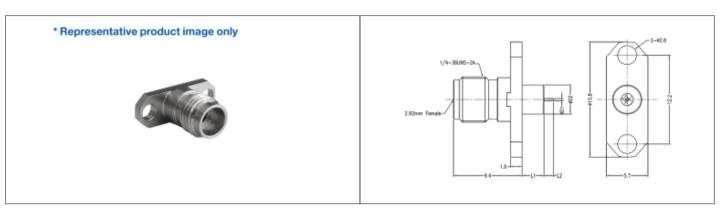

// Product Description:

- O 2.92mm Jack Straight 2 Hole Flange RF Connector
- O Maximum Voltage: 250V
- O Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: Product Series: Body Length: **Body Material: Centre Contact Retention Force: Contact Pin Material:** Min Coupling Torque: Max Coupling Torque: **Dielectric Withstanding Voltage:** Durability: Flange Mount Length: Function: Impedance: Insulation Resistance: Insulator: Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Pin Diameter: Pin Length: Ptfe Diameter: Ptfe Length: Thread Size: Voltage Max: Vswr:

2.92mm Series Pin with Extended PTFE 2 Hole Flange Radio Frequency Connectors 2.92mm Series 9.40mm Stainless Steel Passivation >20N Beryllium Copper 0.80Nm 1.10Nm >750V >500 cycles 15.80mm Female Flange Mount RF Connector 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 12.20mm 0GHz 40GHz 0.60mm 1.27mm 4.00mm 10.10mm 1/4 36UNS 2A 250V <1.30

// Product PDF Links

2.92mm Series Product Datasheet



RF292A2JEGCCGH3D CAD Model

Have a question or project enquiry you'd like to talk to us about?