RF292A2PCEE Datasheet




Product Name // 2.92mm Plug Straight 2 Hole Flange RF Connector

View Product Page

* Representative product image only



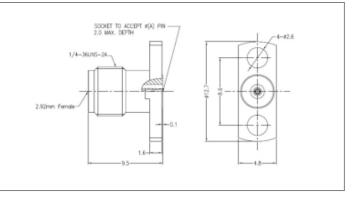

// Product Description:

- 2.92mm Plug Straight 2 Hole Flange RF Connector
- Maximum Voltage: 250V
- C Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: Product Series: Body Length: Body Material:

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Vswr:

Max Operating Temperature:
Min Operating Temperature:
Mount Hole Distance:
Min Operating Frequency:
Max Operating Frequency:
Socket Diameter:
Thread Size:
Voltage Max:

2.92mm Series Socket 2 Hole Flange

Radio Frequency Connectors

2.92mm Series 12.90mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm 1.10Nm >750V >500 cycles 12.70mm

Male Flange Mount RF Connector

50Ohm >5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 8.90mm 0GHz 40GHz 0.51mm 1/4 36UNS 2A 250V <1.30

// Product PDF Links



// Product 3D CAD Model Links



RF292A2PCEE3D CAD Model