
# **RF292A4JCCADAB** Datasheet



## Product Name // 2.92mm Jack Straight 4 Hole Flange RF

### Connector

## View Product Page

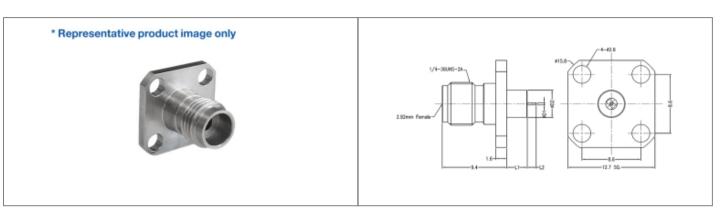

## // Product Description:

- O 2.92mm Jack Straight 4 Hole Flange RF Connector
- O Maximum Voltage: 250V
- O Temperature range: -40°C to +85°C
- O Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

### // General Information:

Product Display Title:
Product Family:
Product Series:
Body Length:
Body Material:
Centre Contact Retention Force:
Contact Pin Material:
Min Coupling Torque:
Max Coupling Torque:
Dielectric Withstanding Voltage:
Durability:
Flange Mount Length:
Function:
Impedance:
Insulation Resistance:
Insulator:
Max Operating Temperature:
Min Operating Temperature:
Mount Hole Distance:
Min Operating Frequency:
Max Operating Frequency:
Pin Diameter:
Pin Length:
Ptfe Diameter:
Ptfe Length:
Thread Size:
Voltage Max:
Vswr:

Radio Frequency Connectors 2.92mm Series 9.50mm Stainless Steel Passivation

2.92mm Series Pin with Extended PTFE 4 Hole Flange

>20N Beryllium Copper 0.80Nm 1.10Nm >750V >500 cycles 12.70mm Female Flange Mount RF Connector 50Ohm >5000MOhm UNFILLED ULTEM 1000/PEI +85°C -40°C 8.60mm 0GHz 40GHz 0.30mm 1.50mm 1.67mm 3.00mm 1/4 36UNS 2A 250V <1.30

#### // Product PDF Links

2.92mm Series Product Datasheet



RF292A4JCCADAB3D CAD Model