RF292A4JCCE Datasheet




Product Name // 2.92mm Jack Straight 4 Hole Flange RF Connector



* Representative product image only



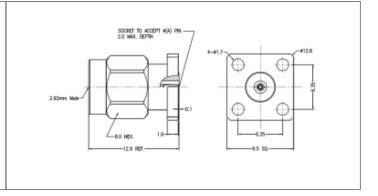

// Product Description:

- O 2.92mm Jack Straight 4 Hole Flange RF Connector
- O Maximum Voltage: 250V
- O Temperature range: -40°C to +85°C
- Frecuency range: 0GHz 40GHz
- O VSWR:

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

// General Information:

Product Display Title: Product Family: Product Series: Body Length:

Body Material:

Centre Contact Retention Force:

Contact Pin Material:
Min Coupling Torque:
Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter:

Thread Size: Voltage Max: Vswr: 2.92mm Series Socket 4 Hole Flange

Radio Frequency Connectors

2.92mm Series

9.50mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm 1.10Nm

>750V >500 cycles

12.70mm

Female Flange Mount RF Connector

50Ohm

>5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 8.60mm 0GHz 40GHz 0.51mm 1/4 36UNS 2A

250V <1.30

// Product PDF Links







RF292A4JCCE3D CAD Model