# RF292A4PCCC Datasheet




## Product Name // 2.92mm Plug Straight 4 Hole Flange RF Connector

View Product Page

#### \* Representative product image only



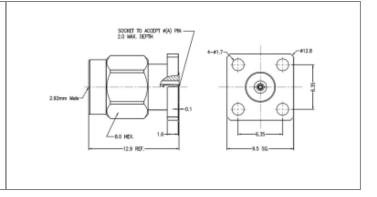

### // Product Description:

- O 2.92mm Plug Straight 4 Hole Flange RF Connector
- Maximum Voltage: 250V
- 0 Temperature range: -40°C to +85°C
- 0 Frecuency range: 0GHz - 40GHz
- 0 VSWR: <1.30

- O Dielectric withstanding Voltage: >750V
- O Impedance: 500hm
- O Body Material: Stainless Steel Passivation
- O Contact Material: Beryllium Copper

#### **General Information:**

**Product Display Title: Product Family: Product Series:** Body Length:

**Body Material:** 

Centre Contact Retention Force:

Contact Pin Material: Min Coupling Torque: Max Coupling Torque:

Dielectric Withstanding Voltage:

Durability:

Flange Mount Length:

Function: Impedance:

Insulation Resistance:

Insulator:

Max Operating Temperature: Min Operating Temperature: Mount Hole Distance: Min Operating Frequency: Max Operating Frequency: Socket Diameter:

Voltage Max: Vswr:

2.92mm Series Socket 4 Hole Flange

Radio Frequency Connectors

2.92mm Series 12.90mm

Stainless Steel Passivation

>20N

Beryllium Copper

0.80Nm 1.10Nm >750V >500 cycles 12.70mm

Male Flange Mount RF Connector

50Ohm >5000MOhm

UNFILLED ULTEM 1000/PEI

+85°C -40°C 8.60mm 0GHz 40GHz 0.38mm 1/4 36UNS 2A 250V <1.30

// Product PDF Links



// Product 3D CAD Model Links



RF292A4PCCC3D CAD Model